



Awning Instructions

Side Awning Installation Instructions 1.6m

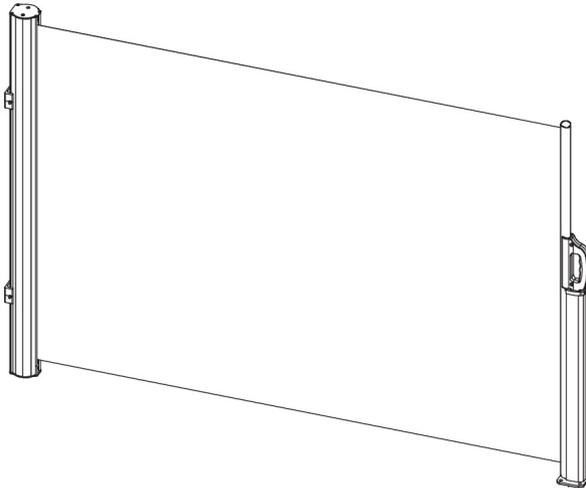

Full Cassette Wind Break Awning Instructions

Notes

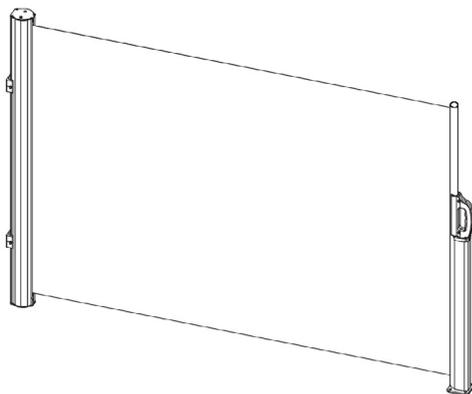

Please read this instruction manual carefully before commencing the installation and operating the awning.

Notes

We recommend that two or more people are required to lift the awning into place.

The awning and frame may be supplied with a plastic wrapper. This should be removed prior to use.

Plastic bags can be dangerous to children and babies. Keep out of the reach of babies and children to avoid the risk of suffocation.

**The expansion bolts supplied are for reinforced concrete or brick walls.

The awnings may be installed on wooden walls if the wall is sufficiently strong. Use appropriate screw-threaded or coach bolts.


Guarantee

This awning is guaranteed against faulty parts and workmanship for one year from the date of delivery. Faulty parts will be replaced or exchanged within that period. The guarantee covers domestic use only.



Contents

The pack should include the following parts:

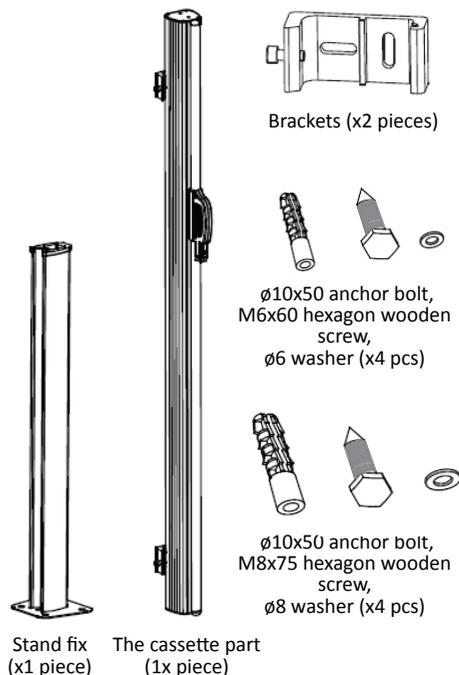


Installation


Please prepare the following tools before installation (these tools are not provided)

1. Tape Measure
2. Hexagonal spanner CR-V5mm
3. Cross screwdriver
4. Drill


Warning: When mounting the awning, keep the main part and stand column on the horizon, or the fabric will be deformed and difficult to open and close.

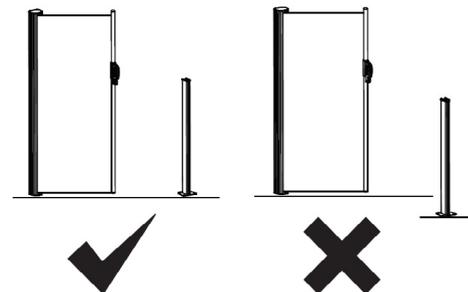

1. Drill 6cm deep holes in the size as the following picture shows.

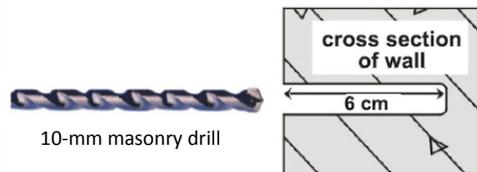


2. Insert one $\varnothing 10 \times 50$ mm anchor bolt in each of the holes.

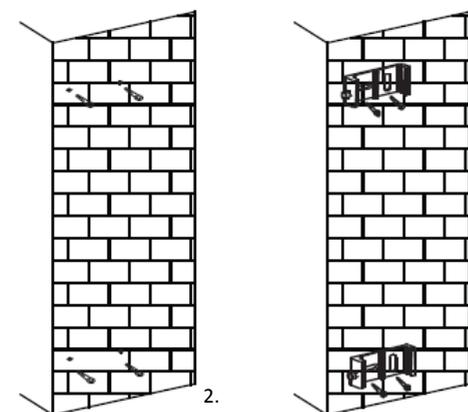

Installation (continued)


3. Fix the bracket with the M6x60mm hexagon wooden screw.

4. Insert the cassette part into the bracket, tighten the flat fillister head screw M6x16mm with hexagonal spanner CR-V5mm.

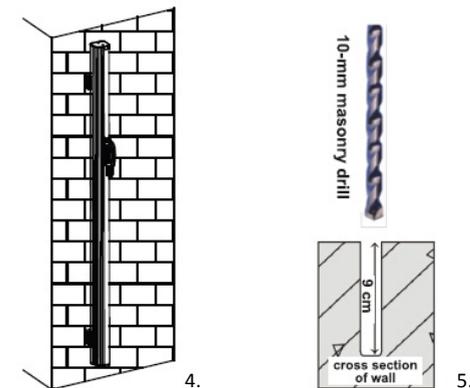

5. Drill four 10mm diameter holes on the floor in the size as shown in picture 5.


6. Insert one 10x50mm anchor bolt (x4 pcs)

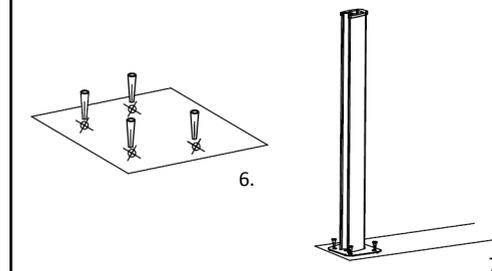


7. Make the left bottom hole of stand fix and the hole on the floor alignment and tighten them with M8x75mm hexagon wooden screw.

Correct Use

1. Keeping the front bar upright, hold the handle and push it above the stand column. Hold the handle and press the handle spindle that the pin comes into the handle, and then put the handle into the stand column.

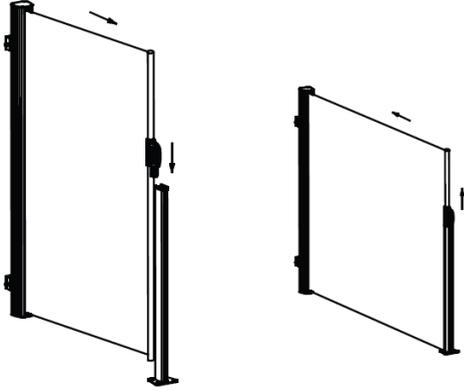

2. When you want to close it, hold the handle and pull up the handle spindle. Keeping the fabric horizontal and push the handle back to the cover slowly.

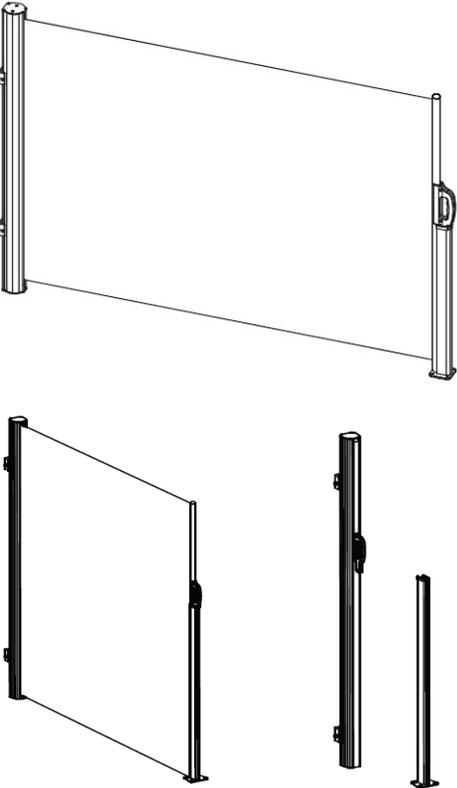

General care & precautions

Once the awning is installed, it is important to note how to properly care for the components, to make your awning work as long and efficiently as it can. The awnings are constructed from weather resistant powdercoated metal and hardwearing polyester fabric, and are designed to give many years of service. Stains and bird droppings etc. can easily be washed or sponged away, and should not be left for prolonged periods. The awning should always be retracted in severe weather conditions.

The hook shaft, gearbox and joints on awnings should be sprayed with silicone in order to lubricate (4-6 months). WD-40 can also be used instead of silicone.

Framework of the awning should be cleaned at the very least once every year. By using a mild detergent with warm water and a sponge or soft cloth, the fabric can be wiped and marks can be removed making the awning look like new.

The fabric is made from hardwearing, waterproof, rot-proof, PU and UV stabilised 300gsm polyester and is easy to sponge clean. It is 100% waterproof fabric so you can cover up your awning on wet winter days.